


## UST-EFL0036

## **Heavy-Duty Extendable Insulating Fiber Glass Ladder**

Heavy-Duty Extendable Insulating Fiberglass Ladder, engineered for unparalleled strength and safety. Made of durable fiberglass construction, extendable design for versatile reach, and insulating properties for electrical safety. This ladder is your reliable partner for demanding tasks, offering stability, durability, and peace of mind.



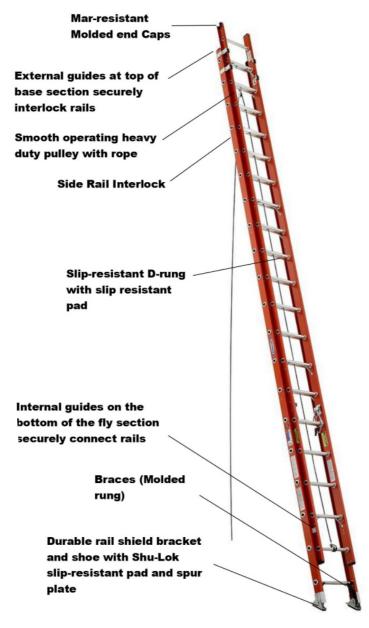

## **Features:**

- Lightweight and durable material, ideal for electrical work due to its non-conductive properties.
- Reliable locking system to ensure stability when the ladder is extended.
- Resistant to corrosion, rust, and weather elements for durability in outdoor environments.
- Designed to support the intended load without compromise.
- Compliant with relevant safety standards and regulations, ensuring its suitability for professional use.
- Simple and straight forward setup process for efficiency.

## **Standard Parameters:**

Size	40 ft.
Number of Sections	2
Max. Open Extended Length	37 ft
Reach Height	36 ft
Safe Working Height	36 ft
Overall Width	20 inch
Material	Light Weight Fiberglass
Weight	88 Pounds
Steps/Rung Dimension	1.8 inch
Rung Type	D-Rung
Number of Rungs (Section x Rungs)	2 x 20
Rung Material	Aluminum alloy with anti-slip coating.
Load Capacity	300 lbs.
Foot Design	A slip-resistant shoe with Shu-Lok & reg,
	feature, and spur plate
Pulley & Rope	High-Quality heavy duty durable & repeated
	usable operating pulley & Rope
Standard	ANSI A14.4-1982, Type-1A