

SINGLE SHEAVE BLOCK


Updated Product

US Tools Single Sheave Block


- The incorporation of fiber-filled natural nylon ensures exceptional strength and resilience
- High Dielectric, Fiber filled, natural nylon shell & sheave
- Drop Forged Steel hook swivel
- Capable of withstanding heavy loads and harsh environmental conditions
- Lightweight yet robust construction makes it a versatile choice for a myriad of tasks, from rigging and lifting operations to outdoor adventures and DIY projects.



UST-SSB1

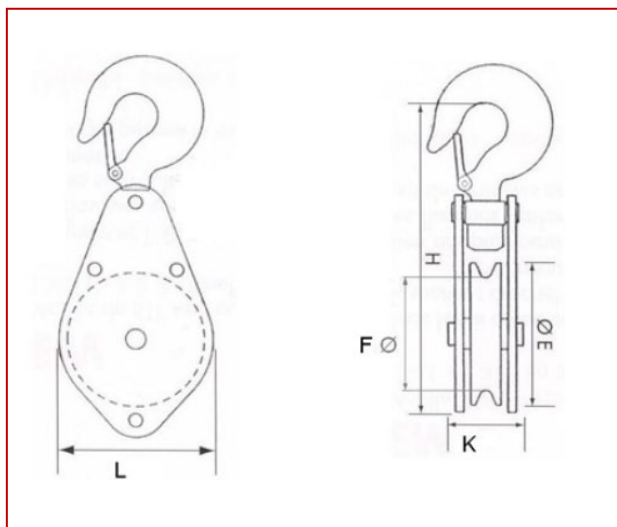

This single pulley block reduces friction and wear, enabling smooth and seamless operation even under demanding circumstances. Its sleek and ergonomic design facilitates easy installation and maintenance, ensuring hassle-free performance whenever and wherever you need it

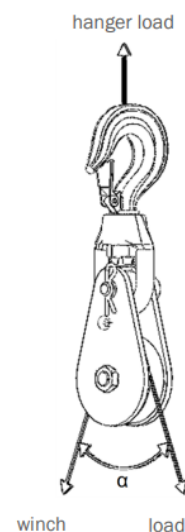

STANDARD PARAMETER

Feature	Return pulley with a wire rope and it is provided with a drop forged steel sheave and a hook with safety catch.
Block Type	4" (102mm) Single Sheave
Light Duty	Light duty pulley for wire rope
Sheave Size	2-1/4"x5/8"x3/8" (57mm x 16mm x 10mm)
Bichromated coating	Zinc bichromated coating
Max Rope Size	1/2" (13mm)
Ultimate load	Ultimate load is 4 times the working load limit (WLL)
Max Working Load	1000 lbs. (454Kgs)

Note: For Quality Reason, we have the right to change the color or design of the tools without any prior notice.



FEATURES

High Dielectric, Fiber-filled Pulley Blocks, crafted from natural nylon for unparalleled durability and performance. Engineered with precision, this pulley block boasts a high dielectric strength, making it ideal for applications where electrical insulation is paramount



Sheave Design: The block likely features a sheave, which is a grooved wheel used to guide a rope or cable. This design simplifies the block's structure and operation.

High-Quality Materials: It's probable that the block is constructed from high-quality materials. This ensures longevity and resistance to corrosion, making it suitable for various environments including marine or industrial applications

Non-Conform Uses

- Always use suitable rope (size, length and capacity)
- Strictly forbidden to either be under or to walk under the load
- The block should be regularly inspected (prior checking, parts correctly assembled, no excessive movement, no excessive wearing or corrosion, no deformation)
- Prior to using the block, check for proper position and locking of the snatch block
- Never use a block with a hook as head fitting without ensuring that the safety latch is correctly placed



Note: For Quality Reason, we have the right to change the color or design of the tools without any prior notice.

