

# LINEMAN SAFETY STRAP

Updated Product





## US Tools Lineman's Safety Strap

- Designed to meet CSA Z259.11 as a Class "F" lanyard.
- Also meets or exceeds CSA Z259.12; OSHA 1910, 1926.959.
- Stitched 1/2" rope with red center indicator threads.
- Maximum 8' length (2.4m)
- Rope adjuster (LAD) that easily adjusts.
- Made in U.S.A.
- The straps are made of six piles vulcanized coated neoprene nylon.

## UST-LS58

### STANDARD PARAMETER

<b>Adjustable Range</b>	1.8 "
<b>Locking Mechanism</b>	Robust internal locking
<b>Strap Punched Hole</b>	1" apart
<b>Quick-Release Buckle</b>	Yes
<b>Strap Width</b>	1-3/4" (44mm)
<b>Stitching</b>	Reinforced stitching
<b>Strap Length</b>	5'-8" (1.7m)
<b>Standard</b>	OSHA 1926.959 & ASTM

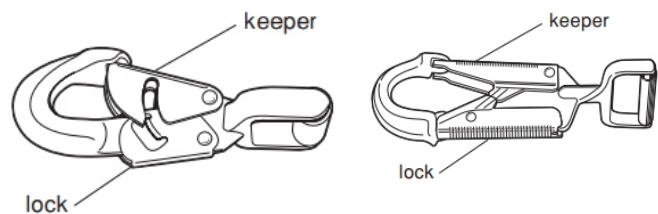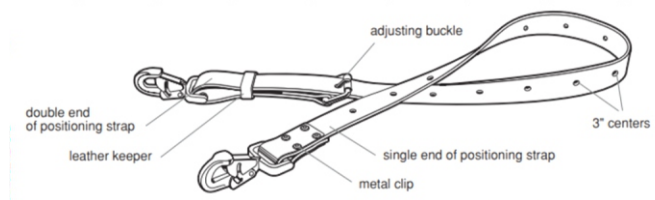

### Each set contains three types of warning/information tags:

1. A General Hazard Tag will be attached to each OPE product.
2. General Warning Tags will be included on all OPE products in a particular category. For example, all OPE harnesses will have general harness warning tags.
3. A Product ID Tag will be attached to each OPE product.

Note: For Quality Reason, we have the right to change the color or design of the tools without any prior notice.



## FEATURES


- Adjustable straps are 1-3/4" (44 mm) wide.
- Made from 6-ply for maximum wear and chemical resistance.
- Drop-forged, single-tongue adjustment buckle has a corrosion-resistant finish.
- Two drop-forged steel locking snap-hooks with a 11/16" (17 mm) throat opening.
- Buckles are made of single tongue adjustment with two number of snape
- 1.8' adjustable range



- Constructed from durable, six-layer 1-3/4" (44 mm) wide US Tools fabric, known for its exceptional strength and flexibility.
- Features an extended 6-1/2" (165 mm) snap hook that facilitates operation even with bulky gloves.
- The Centre Piles are built in with two red wear indication layer.
- The snap hook is rated with a proof load capacity of 5,000 lbs.
- Includes a red indicator at the strap's midpoint to notify users when a replacement is necessary.
- Complies with all relevant OSHA standards and meets or surpasses ASTM and CSA guidelines.

### Types of OPE Warning Tags/Labels

This section contains black and white reproductions of US Tools OPE warning tags/labels. They are organized by product category. Some warning and instructional information may be printed on a durable label wrapped around the product. A set of plastic or Tyvek warning tags are attached to the majority of OPE products.

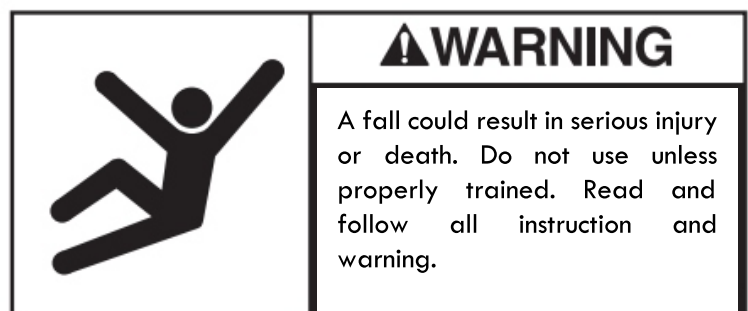

### General Hazard Tag for All OPE Products

This tag is the first in a set of warning tags which will be attached to each US Tools OPE product.

Note: For Quality Reason, we have the right to change the color or design of the tools without any prior notice .

